

MOOG MBL1750N ブーム式橋梁点検車仕様書

輸送時

車両総重量・・・・・・・・・・・・・・・・・・・・・ 32t
車両全長・・・・・・・・・・・・・・・・・・・・・・・・・・ 11.9m
車両全幅・・・・・・・・・・・・・・・・・・・・・・・・・・ 2.5m
車両全高・・・・・・・・・・・・・・・・・・・・・・・・・・ 3.79m
※車両重量緩和車両


作業時（左側展開時）

ゲージ最大差込長・・・・・・・・・・・・・・・・・・・・・ 17.5m
※ゲージ最先端部は作業床が 2.5m 上昇可能
ゲージ最大深長・・・・・・・・・・・・・・・・・・・・・・・・・・ 22.3m
ゲージ最大高長・・・・・・・・・・・・・・・・・・・・・・・・・・ 21.6m
最大歩道超幅・・・・・・・・・・・・・・・・・・・・・・・・・・ 5.2m
最大防音壁超高・・・・・・・・・・・・・・・・・・・・・・・・・・ 4.7m
ゲージ許容最大荷重・・・・・・・・・・・・・・・・・・・・・ 280 kg
※ゲージ差込長 15m 以上 200 kg
旋回台旋回角度・・・・・・・・・・・・・・・・・・・・・・・・・・ T1 220°/T2 180°
使用可能最大風速・・・・・・・・・・・・・・・・・・・・・・・・・・ 12.5 m/s
使用可能最大縦横断勾配・・・・・・・・・・・・・・・・・・・・・ 6% (3.4°)



Under Bridge Access Solutions

Germany-88693 Deggenhausertal Tel. (+49)07555/933-0 Fax (+49)07555/933-66
info@moog-online.de www.moog-online.com

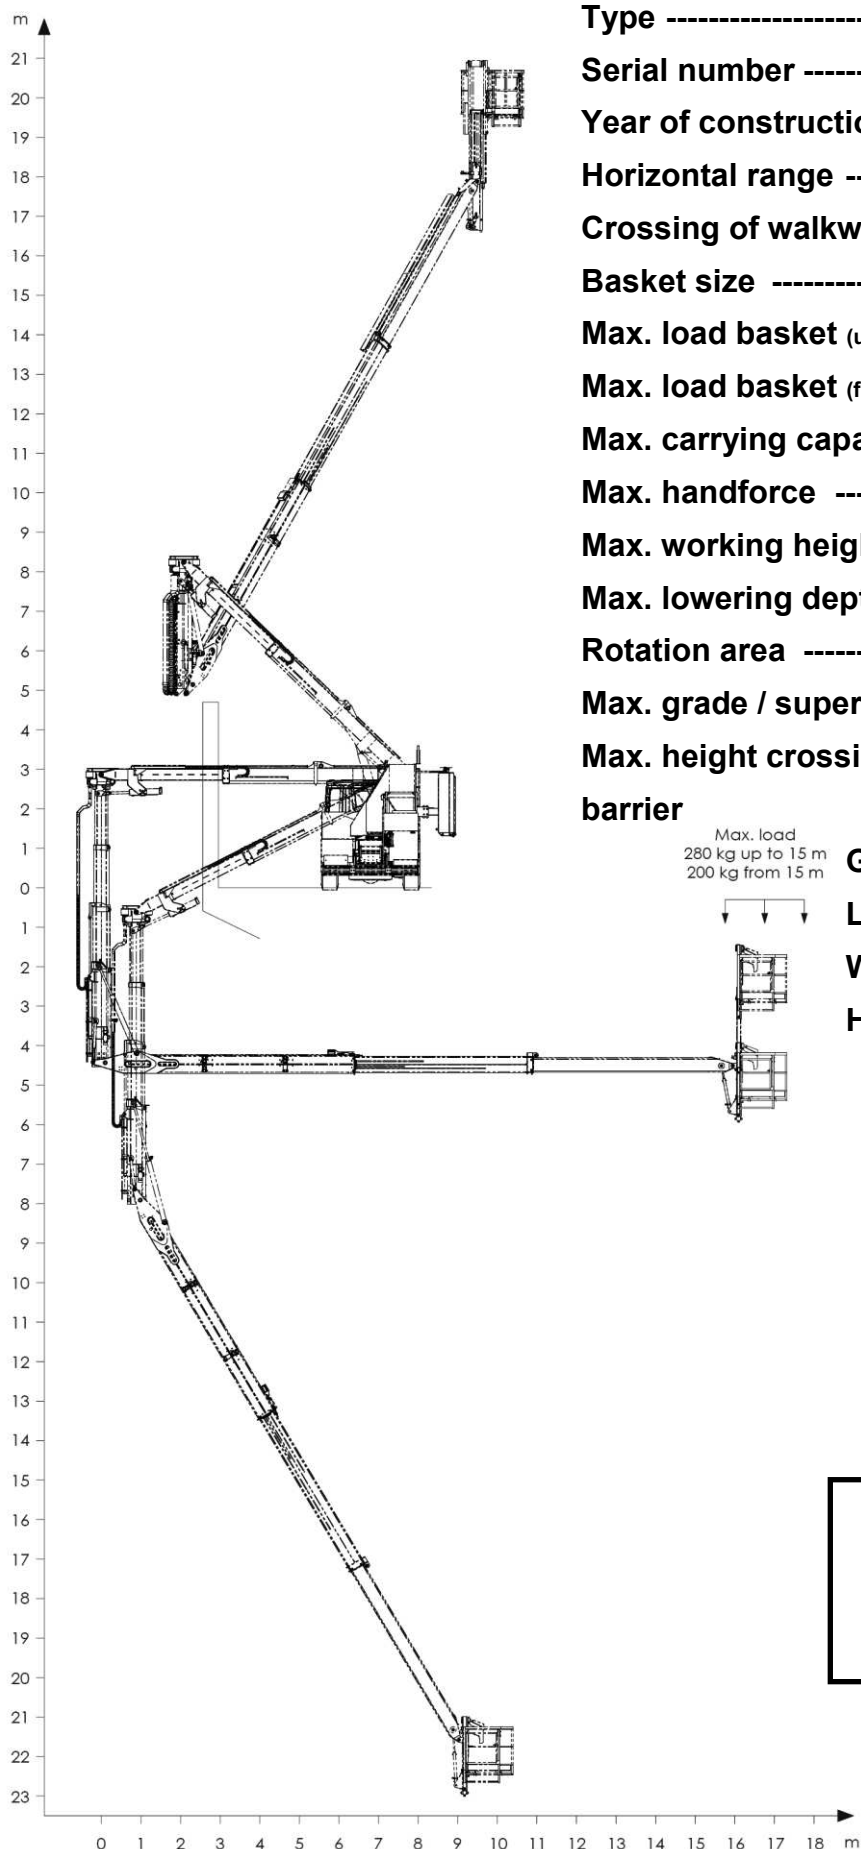

Type ----- MBL 1750 N
Serial number ----- 01.0624.20
Year of construction ----- 2020
Horizontal range ----- 17.5 m
Crossing of walkway----- 5.2 m
Basket size ----- 1.25x1.25 m
Max. load basket (up to 15m)----- 280 kg
Max. load basket (from 15m) ----- 200 kg
Max. carrying capacity ----- 3 Pers.+ 40 kg
Max. handforce ----- 400 N
Max. working height ----- 21.6 m
Max. lowering depth ----- 22.3 m
Rotation area ----- 1x180°, 1x220°
Max. grade / super elevation ----- 6% (3.4°)
Max. height crossing of sound --- 4.7 m
barrier

Max. load
280 kg up to 15 m
200 kg from 15 m

G.V.W ----- 27.000 kg

Length of unit - 12.0 m

Width of unit --- 2.5 m

Height of unit -- 3.8 m

Operation of the unit
is not allowed for
wind speeds
exceeding 12.5 m/s